

Custom Bent Neon Clock

Congratulations on your purchase of a Harley-Davidson® Custom Bent Neon Clock. The utmost care has gone into the design and manufacturing of the neon clock. Please read these instructions carefully.

IMPORTANT:
CAREFULLY REMOVE ALL TWIST TIES AND FOAM THAT SUPPORT THE CUSTOM BENT NEON LETTERS.

Battery Placement or Replacement

Insert one "AA" battery. Be sure to insert the battery following the correct battery polarity (+) or (-) as indicated. When the battery is inserted correctly the second hand will begin to move. The battery is weak or exhausted when the clock does not keep accurate time or suddenly stops. Replace the battery immediately. We recommend using an alkaline battery. **(Please refer to Figure A).**

To Set the Time

Turn the knob on the back of the clock until the correct time is indicated. **(Please refer to Figure A).**

Neon Operation

Separate on/off switch to operate neon power transformer.

Care of your Clock



- To clean, wipe with a soft cloth.
- Do not use any corrosive cleaner or chemical solutions on the clock.
- Do not install in wet location.
- Avoid hanging the clock in direct sunlight or near heaters.
- Ensure there is enough slack in the cord to discourage pulling loose or falling.
- NEVER ATTEMPT TO REPAIR A NEON CLOCK YOURSELF.

AC/DC ADAPTER:

INPUT / 100V 60Hz T MARK for Japan
110V 60Hz UL, CSA for U.S.A., Canada
230V 60Hz TUV GS.CE for Europe
OUTPUT / 12V 500mA

If you have any questions or comments, please contact your retailer.

www.roadhousecollection.com

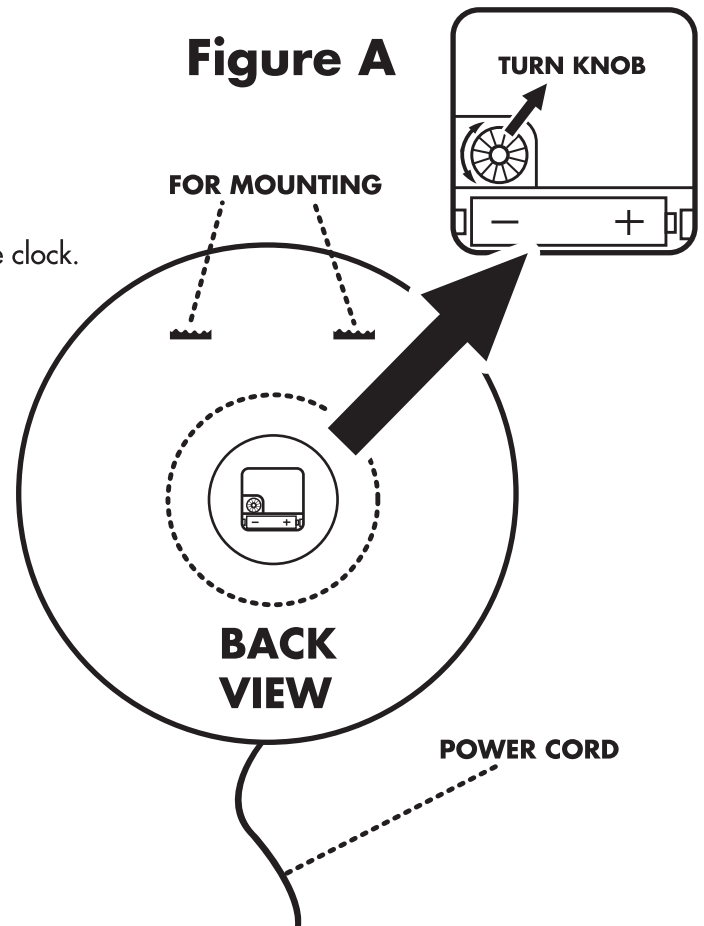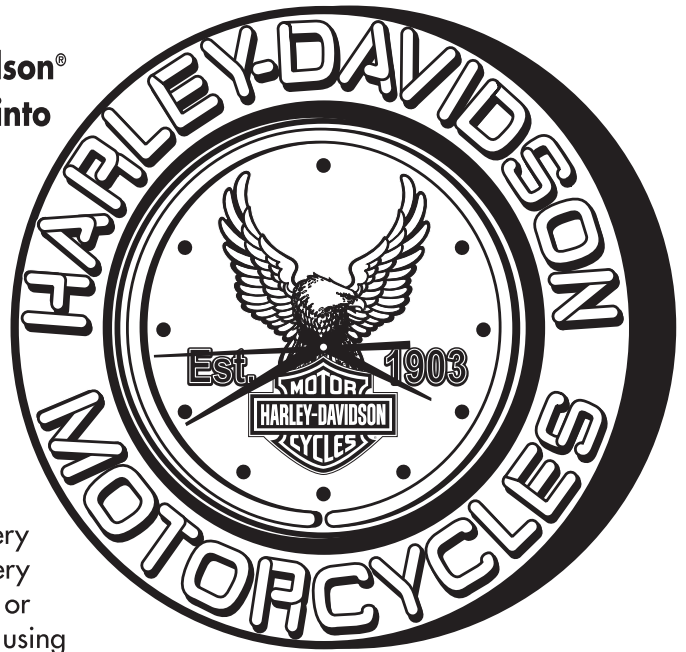

Ace Product Management Group, Inc. Butler, WI U.S.A.
Manufactured under license from Harley-Davidson Motor Co.
© 2006 All Rights Reserved.