


## EL60 Grade 1 Push Button Lockset

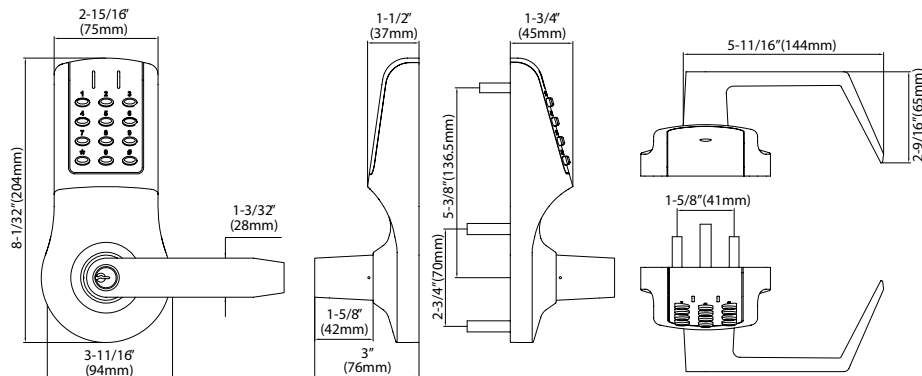

### Specifications

- **Door Thickness:** 1-3/8" (35mm) ~2" (51mm) doors standard.
- **Door Prep:** Crossbore 2-1/8" (54mm), Edgebore 1" (25mm), Latch face 2-1/4" (57mm) x 1-1/8" (28.6mm).
- **Backset:** 2-3/4" (70mm) standard. 2-3/8" (60mm) and 5" (127mm) optional.
- **Cylinder:** 6-pin anti-pick, solid brass cylinder.
- **Keys:** Two (2) keys per lock. Schlage C keyway. Keyed-Different standard. Keyed-Alike, Construction key, Master key suite, or other keyway available by special order.
- **Handing:** Non-handed.
- **Trim:** Solid zinc diecast levers. 55° lever rotation for full latch retraction.
- **Clutch Function (CL):** Outside lever free wheeling while locked to prevent vandalism.
- **Latchbolt:** 1/2" (12.7mm) throw, stainless steel 3 hour fire rated latchbolt. Reversible for flat and beveled doors.
- **Faceplate:** 2-1/4" (57mm) x 1-1/8" (28.6mm) square corner standard. Stainless steel or brass faceplate.
- **Strike:** ANSI curved lip strike 4-7/8" (124mm) x 1-1/4" (32mm) x 1-1/4" (32mm) lip to center standard. Full lip strike or T strike available.

### Finishes

Stocking: US26D(626) Satin Chrome

### Warranty

2 Year Warranty

### Features

- Grade 1
- 3 Hour Fire Rated
- 100 Users
- Passage Mode
- Two-Remote Switches
- Visual & Audible Indicators
- Schlage C Keyway
- 200,000 Cycle Battery Life

### Optional RFID Wireless Remotes

Up to ten (10) Wireless Remotes (EL60-WT) per unit  
Master Remote (EL60-WMT) also available  
Wireless Range of up to 30 feet



EL60-WMT



EL60-WT

### Code Compliance



- ANSI A156.2 Grade 1, UL 10C and UBC 7.2 for positive pressure.
- ANSI A117.1 ADA Barrier-free Accessibility
- C-UBC California Uniform Builders Code-2001
- NFPA-80 National Fire Protection-1999
- NFPA-101 National Fire Protection-Life Safety-2000
- ANSI A156.2 Grade 1, UL 10C and UBC 7.2 for positive pressure.
- ANSI A117.1 ADA Barrier-free Accessibility
- C-UBC California Uniform Builders Code-2001