

Installation Instructions


Dual Bill Acceptor – NGX Mini 2 Kit #26679710, 26679711, 26679712

These instructions outline the procedures to convert an NGX Mini 2 with one bill acceptor to a dual bill acceptor configuration.

Tools Required: #1 Philips Screw driver, 1/4", 11/32" Nut Driver


Parts Included with this Kit:

Item #	Kit Number			Description	Quan
	26679710	26679711	26679712		
1	41023303	41023303	41023303	Bracket & Panel Assembly -2BA, CC	1
2	---	22135614	22135613	Bill Acceptor – CoinCo (-14) or MEI (-13)	1
3	34022350	34022350	34022350	Harness – Dual BA	2
4	34100002	34100002	34100002	Dual BA Interface Assembly	1
5	87843000	87843000	87843000	#8-32 KEPS Hex Nut	6

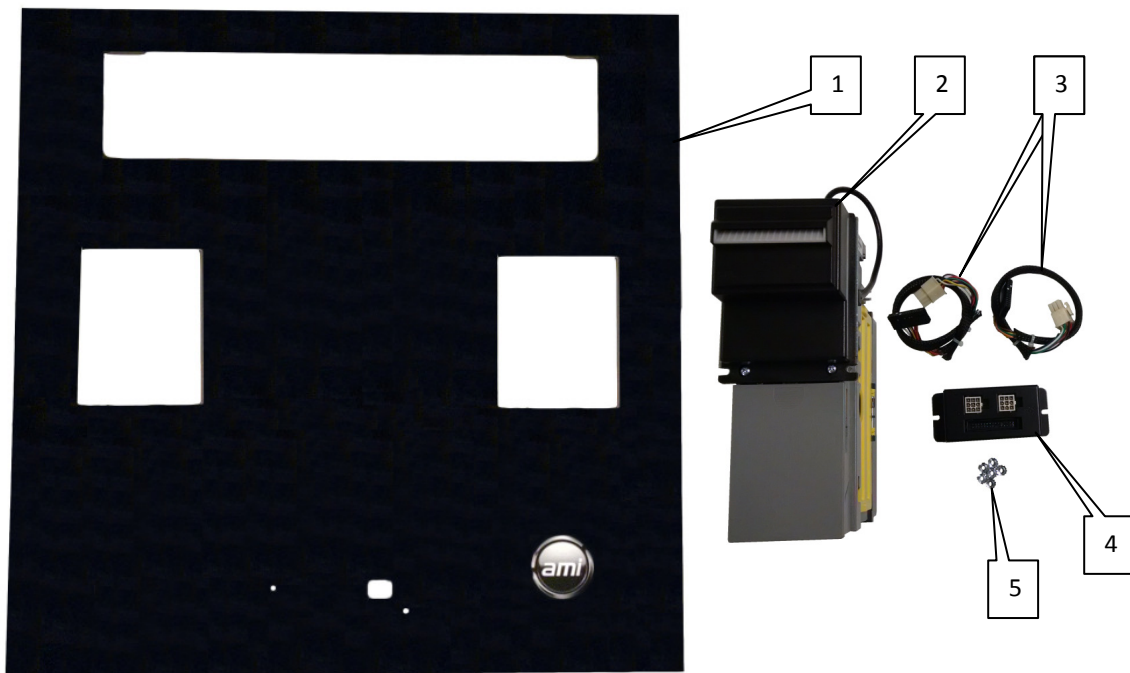

1. Turn the jukebox power off and unplug the power cord from the wall outlet.
2. Open the jukebox door and remove the bill acceptor and credit card reader.
3. Disconnect the (2) two wire connectors powering the AMI logo backlight panel and marquee backlight panel.
4. Remove (4) screws holding the Currency Panel to the door. Remove the Currency Panel out the front of the jukebox door.



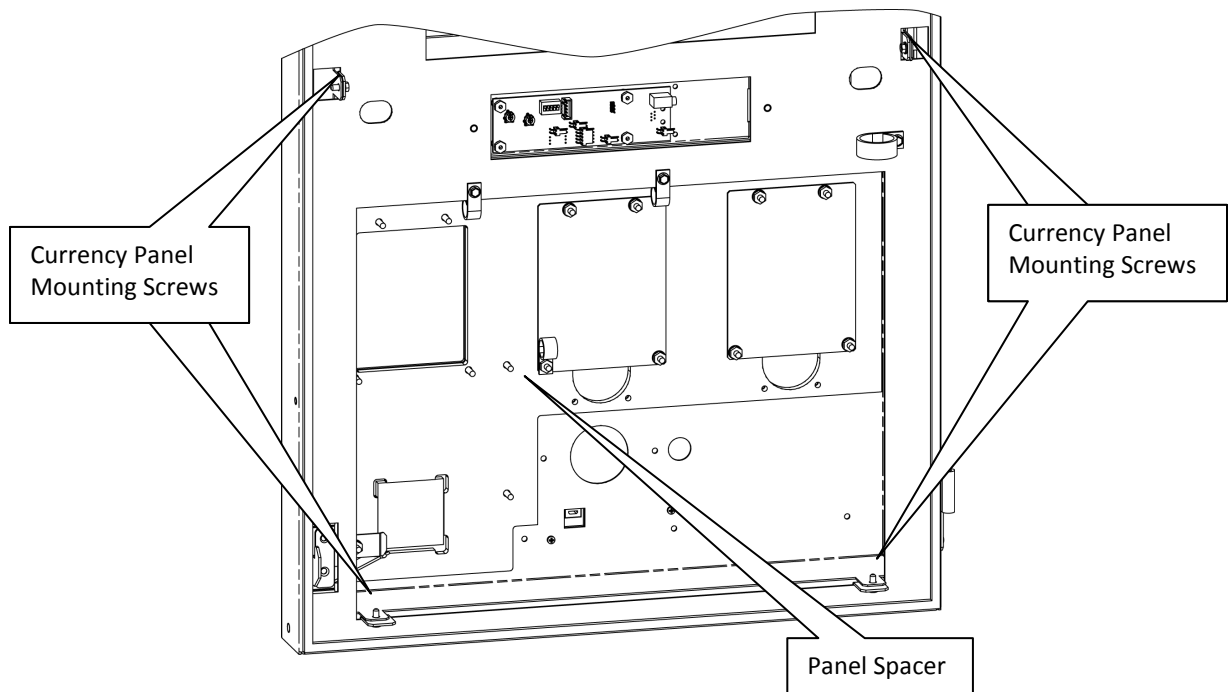

5. Lay the Currency Panel face down on a suitable work surface that will not scratch the front graphic panel. Lay the new Bracket & Panel Assembly (item 1) face down next to the Currency Panel.
6. Remove the following items from the Currency Panel and set them aside to be reused:
(2) block out plates, cable clamp, AMI Logo backlight clamp, panel and LED strip, marquee backlight panel and LED strip, marquee graphic and clear graphic spacer.
7. Carefully remove the ¼" thick panel spacer off the back of the old Currency Panel and install it on the New Currency Panel.
8. Install the components removed in step 6 onto the new Currency Panel leaving the hole for the second bill acceptor open.
9. Install the new Currency Panel into the NGX Mini2 door, secure with the screws from step 4.
10. Reconnect the (2) two pin connectors for the AMI Logo and marquee backlight panels.
11. Reinstall the card reader, the original bill acceptor and the new bill acceptor (item 2 – not supplied with 26679710 kit).
12. Install the Dual BA Interface Assembly (item 4) using (2) #8-32 nuts (item 5).
13. Connect the 30 pin connector on the door harness to the Dual BA Interface Assembly. Connect each bill acceptor to the Dual BA Interface Assembly using the (2) BA Harnesses (item 3).
14. Reconnect the USB cable to the card reader.
15. Power up the jukebox and test for proper operation of the AMI Logo and marquee backlights.
16. Using the Credit Devices Test screen in Service Mode, test for proper operation of both bill acceptors and the card reader.

