



SPECIFICATIONS:

BASE: SYNTHANE
CASE: POLYCARBONATE
CONTACT RATING: 10 AMPS, 24 VDC
COIL RATING: 12/24 VAC/DC
COIL RESISTANCE: 18 ohms ± 10%
MINIMUM TRIP VOLTAGE: 9 VDC
MINIMUM TRIP CURRENT: 500 mA
OPERATING TEMPERATURE RANGE: -40 TO 176°F
(-40 TO 80°C)




NOTES:

1. ALL DIMENSIONS IN [] ARE MILLIMETERS.

MOUNTING HOLE PATTERN



INSTRUCTION PLATE

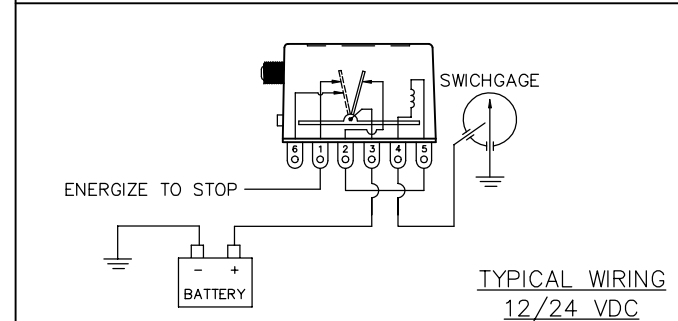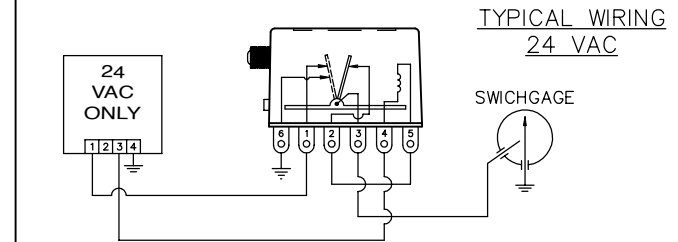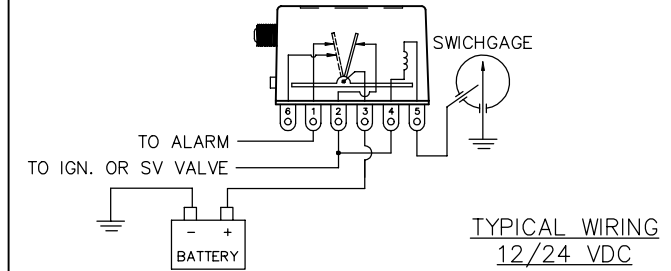

B	REVISED TERMINALS PICTORIALLY		
REV.	1/4/02	JAD	ER02-0003
	CHANGES MADE		



DRAWN BY:	JAD	E.R.NO.01-0744
DATE:	8/30/01	CHKD. BY: JAD APPD. BY: WH

MODEL:	MS2110
--------	--------

DRAWING NO.	SIZE	REV.
25-02-0266	B	B