


H-D® PENDANT LAMP INSTRUCTIONS

WARNING: To avoid risk of electrical shock, turn off power while installing or servicing.

We strongly recommend that a qualified electrician install this fixture.

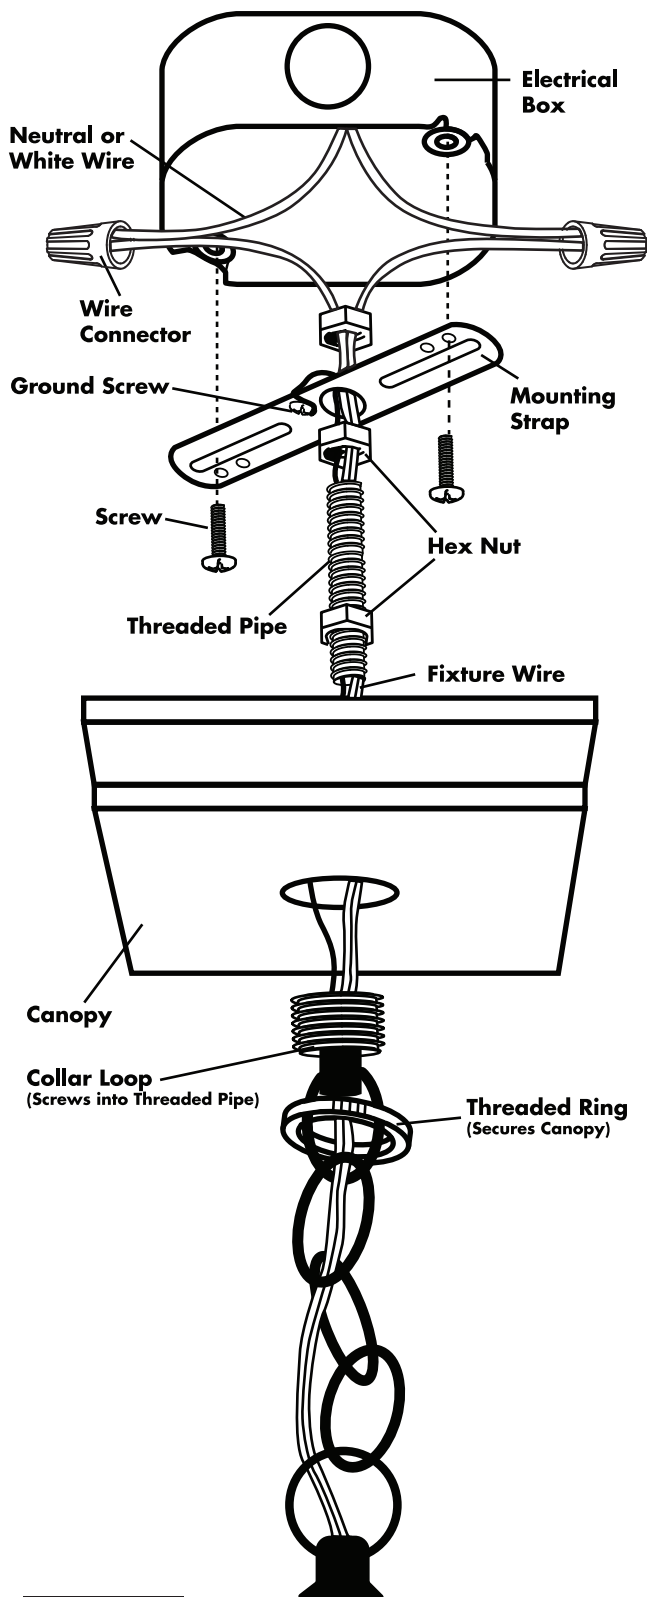

Hanging Instructions

1. Turn OFF power.
2. Carefully unpack and place all parts on a soft surface.
3. Take threaded pipe from parts bag and screw in collar loop a minimum of 1/4" (6mm). Lock into place with hex nut.
4. Run another hex nut down threaded pipe almost touching first hex nut. Screw threaded pipe into mounting strap. Mounting strap must be positioned with extruded thread faced into outlet box. Threaded pipe must protrude out the back of mounting strap. Screw third hex nut onto end of threaded pipe that is protruding from back of mounting strap.
5. Connect mounting strap to outlet box with screws.
6. Unscrew the threaded ring from collar loop. Take canopy and pass over collar loop. Approximately one half of the collar loop exterior threads should be exposed. Adjust collar loop by turning assembly up or down in mounting strap. Remove canopy.
7. After desired position is found, tighten both top and bottom hex nuts up against the bottom and top of the mounting strap.
8. Slip canopy over collar loop and thread on threaded ring. Attach chain with fixture connected to bottom of collar loop. Unscrew threaded ring, let canopy and threaded ring slip down.

Important Notes:

- Fixture wires are connected to the proper house supply wires. If you have any doubt about which house supply wire is the white and which is the black, contact a licensed electrician.
- Insure the electrical box is securely mounted and will be able to support the weight of the fixture.
- The fixture ground wire (bare/green installed wire) is NOT connected to current carrying supply wires.
- No bare wires are exposed outside the wire connectors when joining current carrying wires. The insulation on any of the wires must not be damaged during installation.
- Power is off when installing light bulbs into the fixture. Use light bulbs specified for this fixture. (No greater than 100 watts)

Warranty:

Free replacement of any part that fails within 90 days from date of purchase, excluding shipping costs. Void if damaged by misuse, accidents, alterations, failure to follow instructions, fire, flood, and acts of God.

Questions or comments, contact us at:

BrandedProducts.com



For a dealer near you call toll free 1-800-588-2743 in the USA and Canada or use our dealer locator at www.harley-davidson.com

Ace Product Management Group, Inc. Milwaukee, WI U.S.A. Manufactured under license from Harley-Davidson Motor Co. © 2009 All Rights Reserved.